
ADA Compliant Accessible Parking Spaces All measurements are in inches.

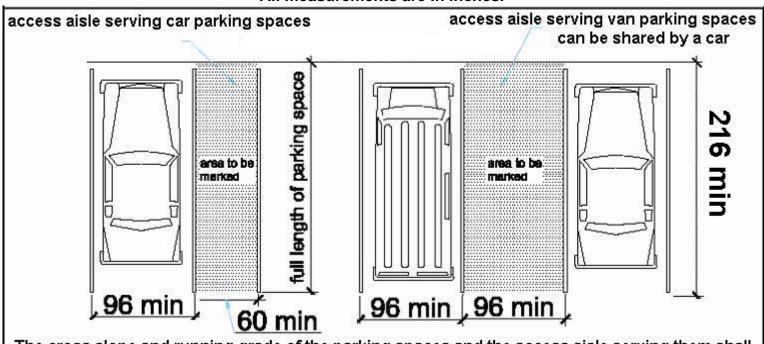

The cross slope and running grade of the parking spaces and the access aisle serving them shall not exceed 2% (1/4" per foot) in any direction.

Total Number of Parking Spaces Provided in Lot	Minimum Required Number of Accessible Parking Spaces
1 to 25	1
26 to 50	2
51 to 75	3
76 to 100	4
101 to 150	5
151 to 200	6
201 to 300	7
301 to 400	8
401 to 500	9
501 to 1000	2 percent of total
1001 and over	20, plus 1 for each 100, or fraction thereof, over 1000

1. Signage.

- a. Must be 60 inches (measured to the bottom of the accessible symbol sign).
- b. Must have metro fine signage included on the post.
- c. Van accessible spots need to be marked as such with signage.

2. Access aisle.

- a. Must be unobstructed.
- 3. Van Parking Spots.
 - a. For every eight or fraction of eight accessible spots a van space is needed.