


This certification form must be completed by a "Metro Certified" Grease Waste Hauler or Plumber.

GREASE INTERCEPTOR CERTIFICATION (Form A)

Every food service establishment in the Metro Nashville Department of Water & Sewerage Services' area must have their grease interceptor certified annually, as required by their FOG permit, to verify that all components of the grease control equipment are present and in good working condition. Furthermore, the inspection will identify any structural problems with the grease interceptor.

Facility Name:	Phor	Phone #:			
Address:	City:,	_,TN. Zip Code			
		<u>PASS</u>	<u>FAIL</u>		
. Interceptor completely emptied and clea	aned before inspection?				
2. There is access to all interceptor chamb	ers for cleaning and inspections?				
Influent (inlet) T is attached and extend	s downward at least 2/3 depth of tank?	<u> </u>			
Effluent (outlet) T is attached and extern	ids downward to within 12" of tank bot	ttom?			
5. Effluent (outlet) T is made of non-colla bend (i.e. minimum schedule 40 PVC, e	<u> </u>	ils			
or grease to escape around edges?					
Interceptor tank does Not have visible holes or leaks?					
. Mid-wall baffle(s) is secure and operat					
. Interceptor maintaining structural integ					
. No Sewer clean-out covers missing or					
questions is "Fail", the equipment has a aken, with date to be completed, needs Comments" (attach additional sheets to inspector Certification – This grease inte	to be provided on the attached sheet explain corrective action if necessary	under "Respons y):	se		
(print name of inspector) certify that the above listed facility has an examined the interceptor and provided the		pacity interceptor.	I have		
(signature)	(date) (phone nu	umber)			
Facility Owner/Manager Certification					
(print name) tatements to be true and correct.	_ certify to the best of my knowledge t	he above			
	(signature)	(date)			

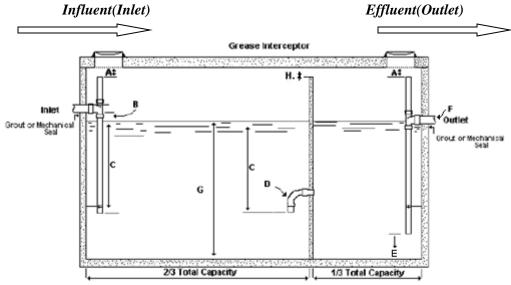

- A.) Minimum 6", but not less than pipe diameter.
- B.) Inlet pipe invert to be 2 1/2" above liquid surface.
- C.) Inlet pipe to terminate 2/3 depth of water level.
- D.) 90 degree Sweep, minimum size 6" and same depth as inlet pipe
- E.) 12" from floor to end of outlet pipe.
- F.) Outlet pipe no smaller than inlet pipe, minimum 4". G.) Minimum depth of liquid capacity 42".
- H.) Maximum distance from ceiling 6".

RESPONSE COMMENTS (required if "Fail" checked, identify problem, corrective action and provide planned date of corrective action)						