

HALF - SECTION


General Notes
 1. Placement of sidewalks shall be in accordance with the Subdivision Regulations of the Metropolitan Planning Commission, latest revision.

2. Construction shall conform to the Metropolitan Department of Public Works Technical Specifications, latest revision.

STANDARD CURB WITH GUTTER
 SEE STD. DWG. ST-200

PAVEMENT SCHEDULE

- ① 1-1/2" ASPHALTIC CONCRETE SURFACE (411D)
- ② TACK COAT (SS-1)
- ③ 2" BITUMINOUS BINDER (B-M2)
- ④ PRIME COAT (RS-2)
- ⑤ 8" STONE (GRADING D PUG MILL MIX)

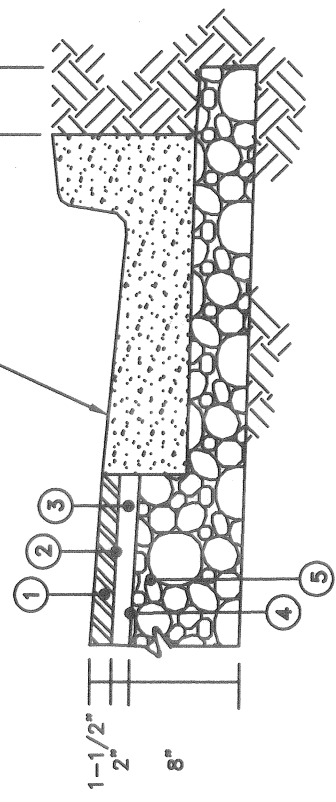

PAVEMENT COURSES

NOT TO SCALE

METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS	RESIDENTIAL DIVIDED STREET (70' MINIMUM R.O.W.)	DWG. NO. ST-250
ASST. DIR. ENG.: <u>Mark Macy</u> DIRECTOR: <u>R. Durm</u>	DATE: <u>5/3/01</u> DATE: <u>5/8/01</u>	REVISED: 04/09/01