

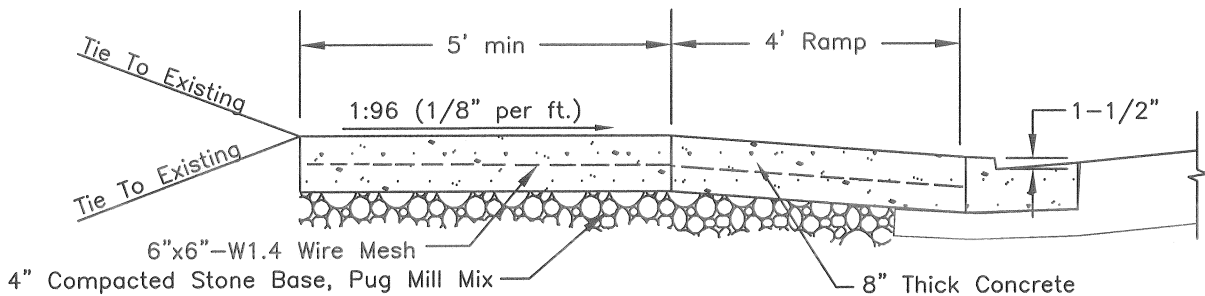


PLAN VIEW

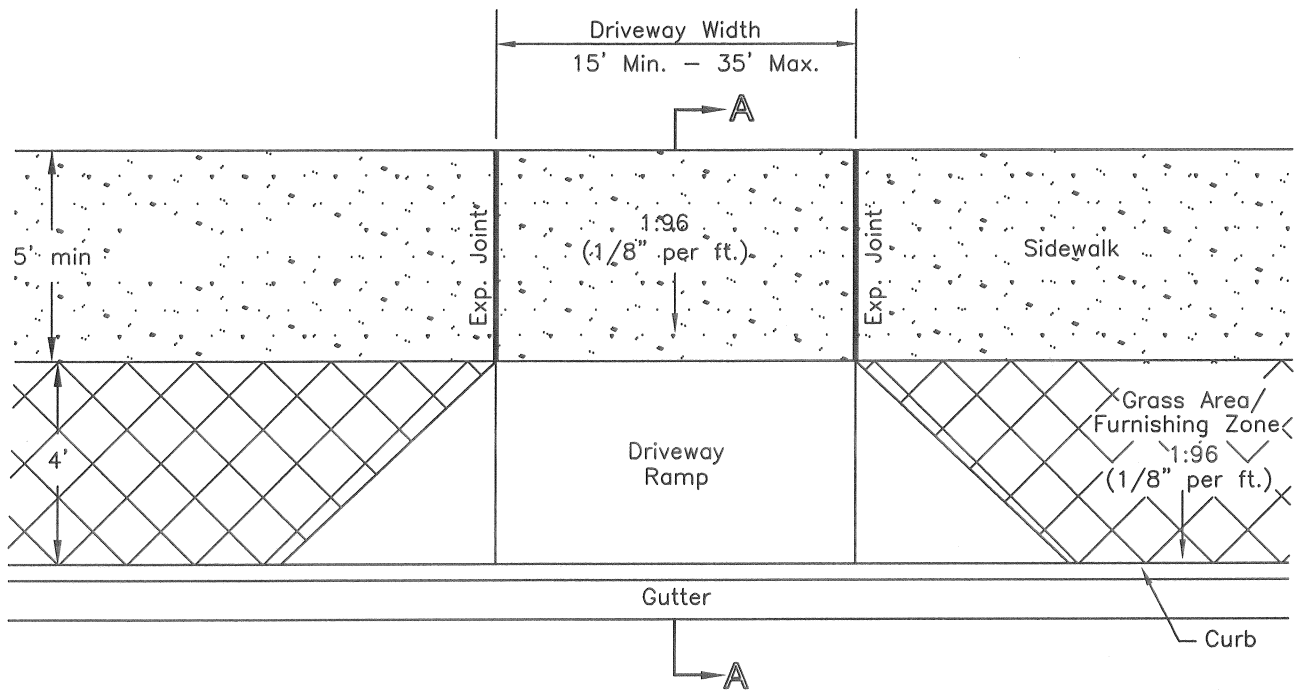

SECTION A-A

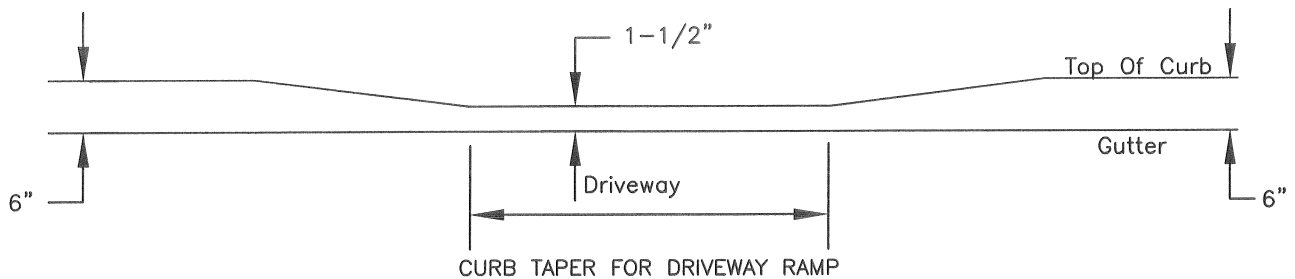

- NOTE: 1. Cross-slope of sidewalk shall not exceed 1:48 (vertical:horizontal).
 2. Fiber mesh reinforcement is an approved alternative for the wire mesh. Fiber mesh reinforcement will be added to the concrete at the batch plant at the rate of 1 1/2 pounds per cubic yard.
 3. Concrete shall be 8 inches thick.

NOT TO SCALE

METROPOLITAN GOVERNMENT OF
NASHVILLE AND DAVIDSON COUNTY
DEPARTMENT OF PUBLIC WORKS

NEW CONSTRUCTION
COMMERCIAL
DRIVEWAY RAMP

DWG. NO. ST-324

DIR. OF ENG.:

Mark May

DATE: 5/12/03

REVISED: 07/27/02
 REVISED: 05/08/03
 REVISED: