

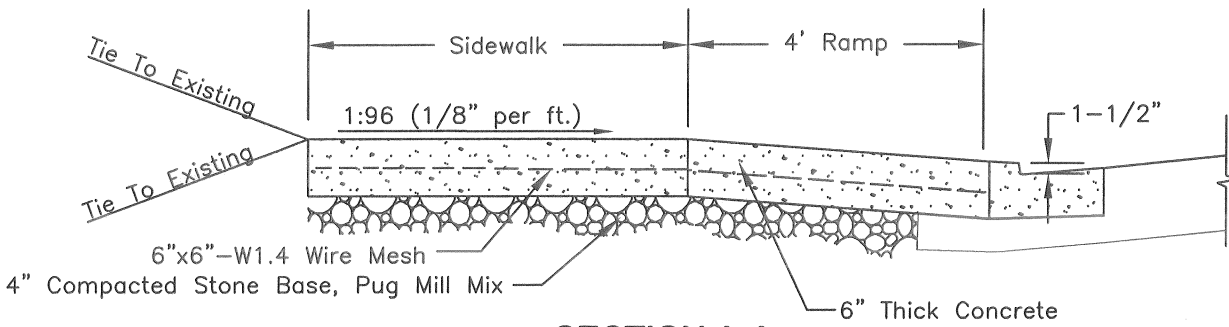


**PLAN VIEW**

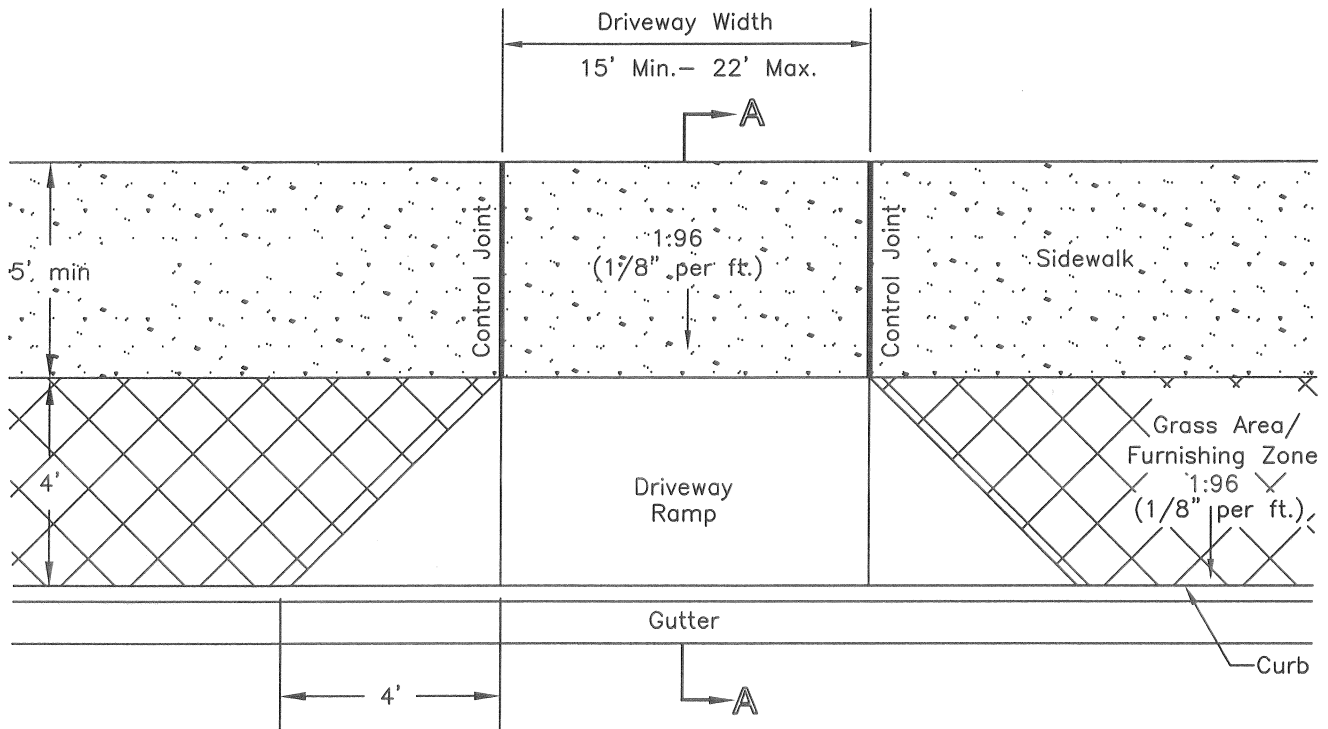

**SECTION A-A**

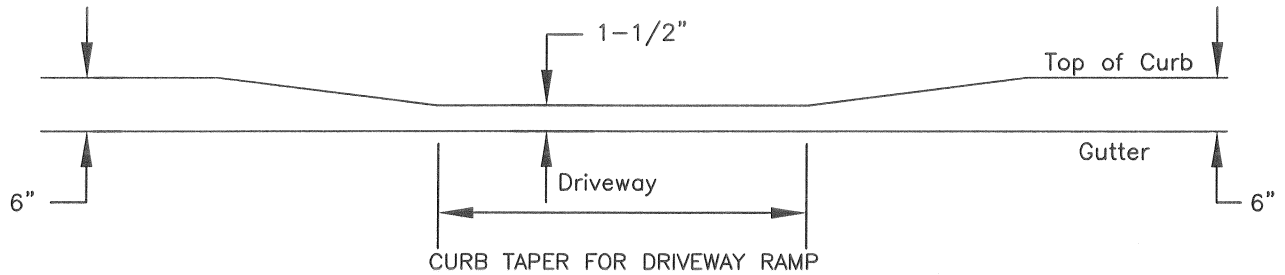

- NOTE: 1. Cross-slope of sidewalk shall not exceed 1:48 (vertical:horizontal).  
 2. Fiber mesh reinforcement is an approved alternative for the wire mesh. Fiber mesh reinforcement will be added to the concrete at the batch plant at the rate of 1 1/2 pounds per cubic yard.  
 3. Concrete shall be 6 inches thick

NOT TO SCALE

METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY DEPARTMENT OF PUBLIC WORKS	NEW CONSTRUCTION RESIDENTIAL DRIVEWAY RAMP	DWG. NO. ST-322
DIR. OF ENG.: <i>Mark May</i>	DATE: 5/12/03	REVISED: 07/27/02 REVISED: 05/08/03 REVISED: